Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang, Chiang Rai 57100
Tel 063 151 6694, 089 632 5829 · www.solaress.org


SOLAR WATER PUMPING · OPTION A · MINIMUM PACKAGE

Start simple: well + pump on grid power

The lowest-cost way to get water: drill the 4" well and install a TORQUE 1.5 HP AC pump on the existing PEA 220 V supply. It pumps day or night, and solar can be added later without changing the pump.

TN-20261020-PUMP-05 | Rev02 | 20 October 2026 | Chiang Rai, Thailand | Approximate prices in THB

How it works

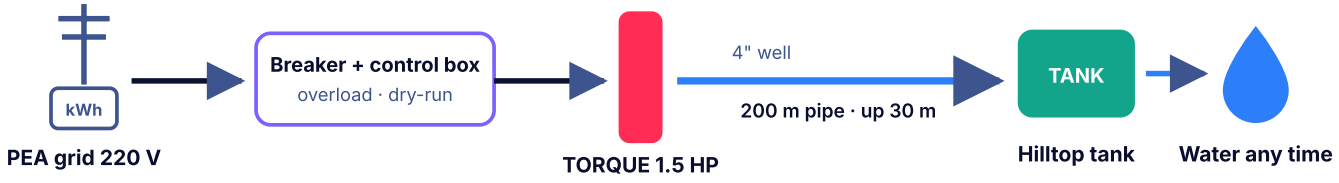

The minimum package

65,000 THB

1 Drilling a 4" well

Drilling with pipe, accessories and safety sling included

17,000 THB

2 TORQUE 1.5 HP AC pump

TQ-SP-2DLBM20-4/S, 1-phase 220 V, plugs into PEA grid power

MINIMUM PACKAGE
82,000 THB
Drilling 65,000 + pump 17,000

What the 65,000 THB drilling price covers

- Drilling the 4" borehole ✓
- Pipe and accessories ✓
- Stainless safety sling for the pump ✓

Option A total, approx. (before VAT) — 82,000 THB

Running cost on grid power

PUMP ENERGY	PER DAY	PER MONTH	PER YEAR
≈ 9 kWh/day	≈ 40 THB	≈ 1,200 THB	≈ 15k THB
1.5 kW × about 6 h	at ≈ 4.5 THB/kWh	30 days of pumping	paid to PEA

Upgrade later to Option B: adding the solar pump inverter system reuses the same well, pump and pipe, and cuts most of this electricity bill. All prices are approximate and before VAT; drilling depth and price are confirmed by the well driller on site. A 220 V PEA supply is assumed at the well; extending the supply line is extra.