Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang, Chiang Rai 57100
Tel 063 151 6694, 089 632 5829 · www.solaress.org


SOLAR WATER PUMPING · OPTION B · EXPANDED SOLAR PACKAGE

Well + pump + solar: water from the sun

Option A plus a solar inverter pump system: 8 × LONGi 650 W panels drive the pump through a Novem solar pump inverter. Free solar power on sunny days, PEA grid backup at night or when cloudy.

TN-20261020-PUMP-06 · Rev02 · 20 October 2026 · Chiang Rai, Thailand · Approximate prices in THB

How it works

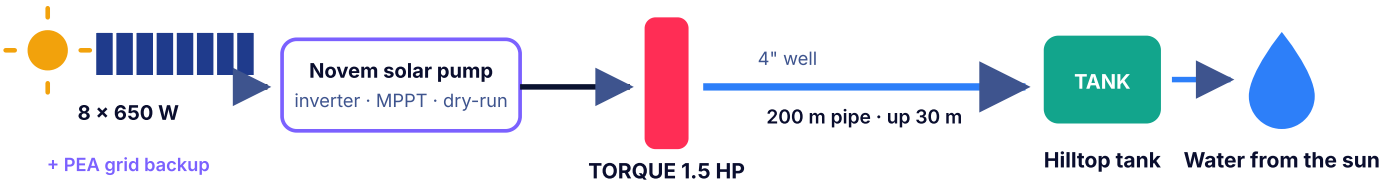

The expanded solar package

1 Drilling a 4" well — 65,000 THB

Drilling with pipe, accessories and safety sling included

2 TORQUE 1.5 HP AC pump — 17,000 THB

TQ-SP-2DLBM20-4/S, 1-phase 220 V

3 Solar inverter pump system — 125,000 THB

Panels, Novem inverter, protection, installation

Option B total, approx. (drilling + pump + solar system) — 207,000 THB

What the solar inverter pump system (125,000 THB) covers

- 8 × LONGi 650 W panels (5.2 kWp) on a galvanised ground-mount frame
- DC isolator + SPD, AC breaker, PV and pump cables, earthing, tank float switch
- Novem ND1-2-003-S solar pump inverter: solar first, PEA grid backup, dry-run protection
- Installation, pipe laying, commissioning and handover

Option A or B over 10 years

Option A · Minimum grid power only	Build 82,000 + Electricity 147,800	229,800 THB over 10 years
Option B · Solar solar + grid backup	Build 207,000	221,800 THB over 10 years

EXTRA COST VS A	ELECTRICITY SAVED	PAYBACK	PANEL LIFE
≈ 125,000 THB	≈ 13k THB/yr	≈ 9 years	25+ years
207,000 − 82,000	≈ 90% of pumping on solar	on pumping energy alone	typical design life

All prices approximate, before VAT. Running costs assume the pump draws ≈ 1.5 kW for about 6 hours a day at ≈ 4.5 THB/kWh, with about 90% of that from solar in Option B. Drilling depth and price are confirmed by the well driller on site.