

FRONT ELEVATION

equipment centred between the columns

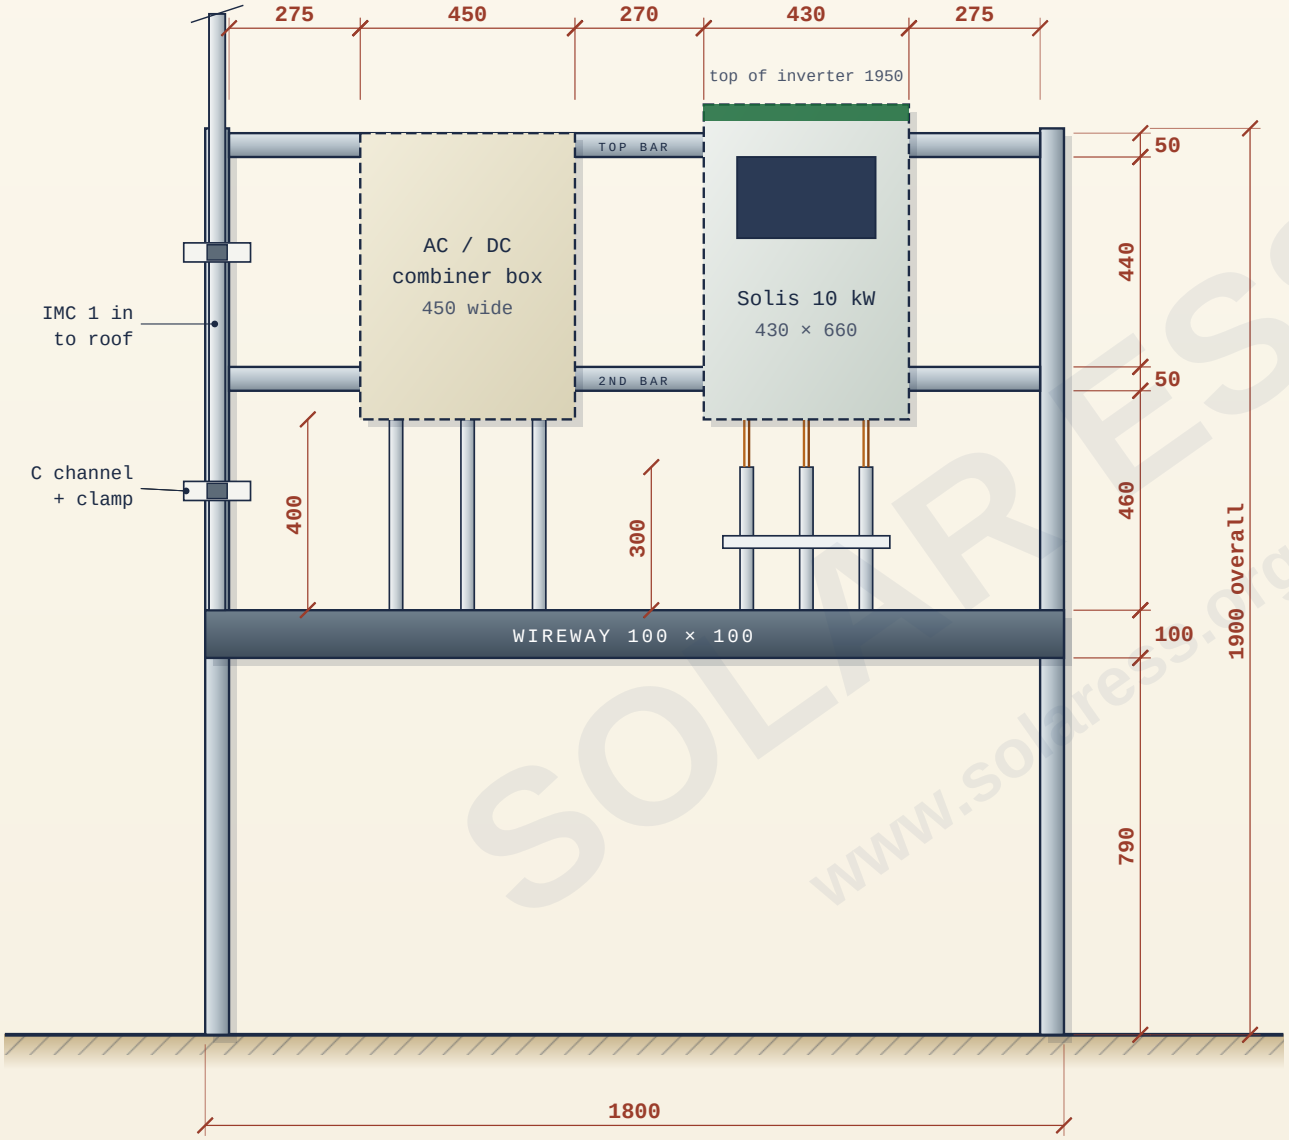

SIDE ELEVATION

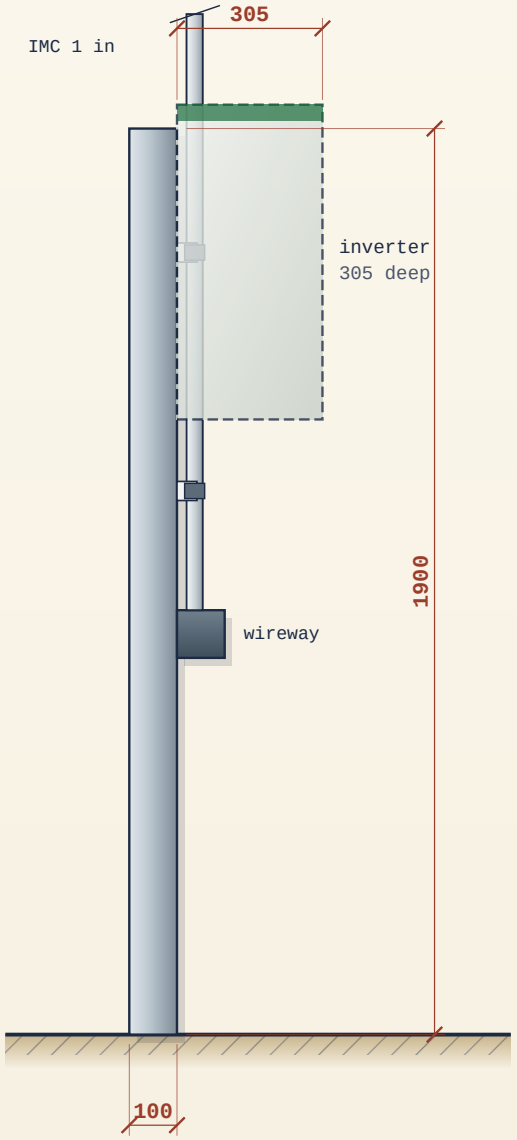

SOLAR ESS
www.solaress.org

Solar ESS Co. Ltd. *Solar Energy for Sustainable Solution*	TITLE **Inverter & Combiner Structure**	OVERALL **1800 W × 1900 H**	STEEL **4 × 2 in tube, 2.3 mm**	UNITS · DATE **mm · 3 Oct 2026**	SHEET **1 / 2 · Rev B**

MEMBERS

PART	SECTION	QTY	LENGTH
Posts	100 × 50 × 2.3 tube	2	1900
Top bar	100 × 50 × 2.3 tube	1	1700
2nd bar	100 × 50 × 2.3 tube	1	1700
Wireway	100 × 100 trunking with cover	1	1800
IMC riser	IMC 1 in, wireway up to the roof	1	to suit
Riser fixing	C channel on the left column, with conduit clamp	2	140
EMT under box	EMT, wireway to combiner box	3	400
EMT under inverter	EMT stubs on strut clamp, top left open	3	300

Tube total 7.2 m: two 6 m stock lengths. Frame steel is about 37 kg at roughly 5.1 kg/m.

NOTES

- **Balanced layout (revised):** the combiner box and the inverter are now spaced evenly between the columns: 275 from the left column, 270 between them, 275 from the right column. This replaces 180, 300 and 340.
- Check: 275 + 450 + 270 + 430 + 275 = 1700, the clear width between the columns.
- Levels from ground: wireway 790 to 890, 2nd bar 1350 to 1400, top bar 1840 to 1890.
- **Check:** the given heights add up to 1890 with 50 mm bars, 10 mm short of 1900. The drawing leaves that 10 mm as post above the top bar.
- **Assumed:** tube set with the 50 mm face to the front and 100 mm deep; bars fitted between the posts.
- Inverter drawn at the size given: Solis 10 kW hybrid, 430 wide × 660 high × 305 deep.
- EMT under the inverter is 300 tall from the wireway and left open at the top, so the cables run free to the inverter cable glands.
- The bottoms of the inverter and the combiner box are both 400 above the wireway (1290 above ground). The open EMT tops are 100 below the inverter.
- The inverter is 660 tall, so its top is at 1950, 50 above the top of the frame.
- IMC 1 in riser comes out of the top of the wireway in front of the left column and runs up to the roof, held to the column by C channel and 2 conduit clamps.
- **Assumed:** two short C channel pieces, one per clamp, at about 1140 and 1640 above ground.
- **Assumed:** combiner box height 600, by eye from the photo.
- Base fixing, feet and bracing are not shown; no measurements were given for them.

SOLAR ESS
www.solaress.org