Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang, Chiang Rai 57100
Tel 063 151 6694, 089 632 5829 · www.solaress.org


SOLAR WATER PUMPING · OPTION C · SOLAR INTEGRATED HOME PACKAGE

Solar for the whole home, pump included

Option A plus an on-grid solar system: 8 × LONGi 650 W panels feed a Solis 6 kW inverter on the home main board. The pump is one of the home loads, so solar power is used all day, by the pump and by the rest of the home.

TN-20261020-PUMP-07 | Rev02 | 20 October 2026 | Chiang Rai, Thailand | Approximate prices in THB

How it works

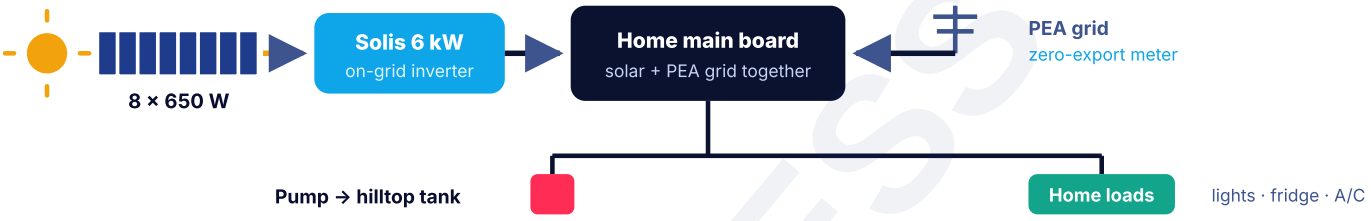

The solar integrated home package

65,000 THB

1 Drilling a 4" well

Drilling with pipe, accessories and safety sling included

17,000 THB

2 TORQUE 1.5 HP AC pump

TQ-SP-2DLBM20-4/S, 1-phase 220 V

125,000 THB

3 Solar on-grid system

Panels, Solis 6 kW, protection, installation

Option C total, approx. (drilling + pump + on-grid solar) — 207,000 THB

What the solar on-grid system (125,000 THB) covers

- 8 × LONGi 650 W panels (5.2 kWp) on a galvanised ground-mount frame
- Solis S6-GR1P6K 6 kW on-grid inverter with WiFi app monitoring
- Solis smart meter + CT for zero export
- DC isolator + SPD, AC breaker + SPD + RCBO, pump control box, cables, earthing, float switch
- Installation and commissioning, plus PEA application with engineer-certified SLD

Solar value per year: Option B or C (Option A has none)

Option B · Solar pump pump only	13,300	**≈ 13,300** THB solar value per year
Option C · Home solar pump + home loads	34,200	**≈ 34,200** THB solar value per year

SOLAR PER SUNNY DAY	EXTRA COST VS A	PAYBACK	ROOM TO GROW
≈ 21 kWh	**≈ 125,000 THB**	**≈ 3.7 years**	**up to 9 kWp**
pump ≈ 9 · home ≈ 12	207,000 − 82,000	if the home uses daytime solar	about 5 more panels later

Approximate, before VAT. Solar value assumes 4.0 kWh/kWp/day at ≈ 4.5 THB/kWh, all used by the pump and home in daytime. On-grid needs PEA approval (Solar ESS files it, included) and stops in a power cut, so the pump stops until the grid returns.