Solar ESS Co., Ltd.
53 Moo 2, Nang Lae, Mueang, Chiang Rai 57100, Thailand
Tel. 063 151 6694, 089 632 5829 · LINE: solaress1
www.solaress.org · www.โซลาร์เอสส์.com

Solar ESS product sheet · October 2026

Wiring

Neat, labelled and built to be serviced

How the cables are run matters as much as which cables we buy.

> **Most faults we are called to on other installers' systems start at a connector or a loose terminal.**


What we fit

Connectors	Genuine MC4-type connectors from the same maker on both halves
Conduit and wireway	UV-resistant on the roof, metal where cable could be damaged
Labels	Every cable, string and breaker


Why we pick it

- Mixing connector brands is a common cause of hot joints and arcing, so both halves always come from one maker.
- Connectors are crimped with the correct tool and terminals are tightened to the stated torque.
- Cables are clipped off the roof surface and kept away from sharp edges and standing water.
- AC and DC are run separately, and polarity is checked before anything is connected.

See our research report on overheated joints on the Technical page.

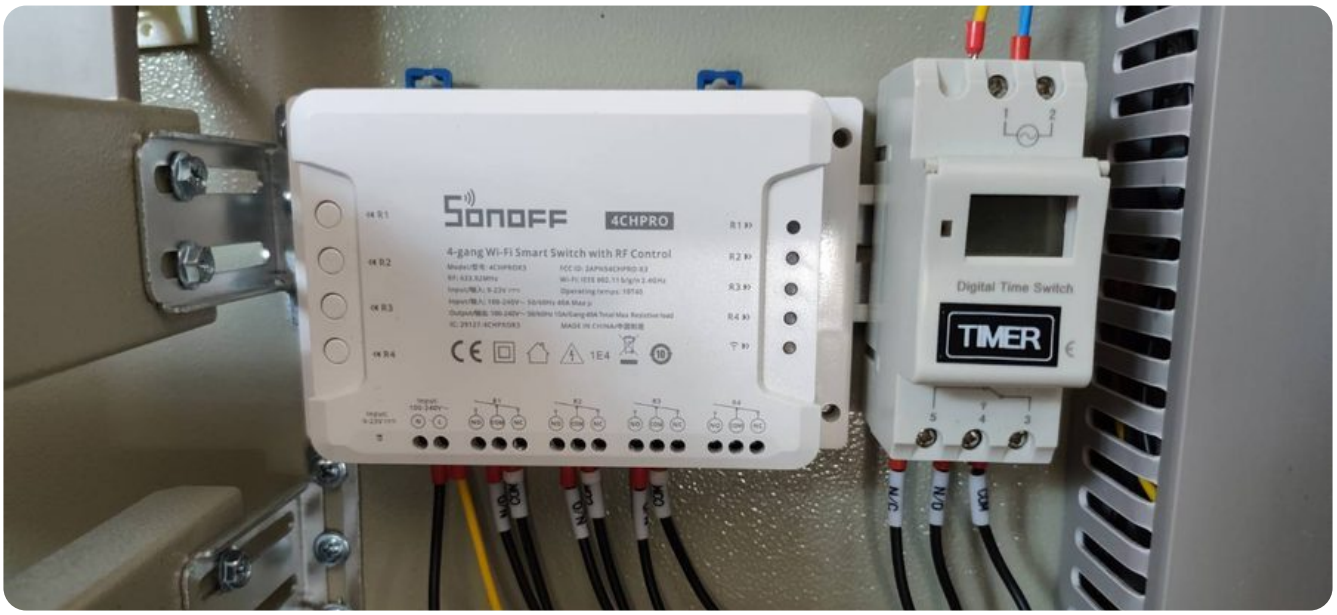

Control box: every wire on a labelled terminal, run in wireway

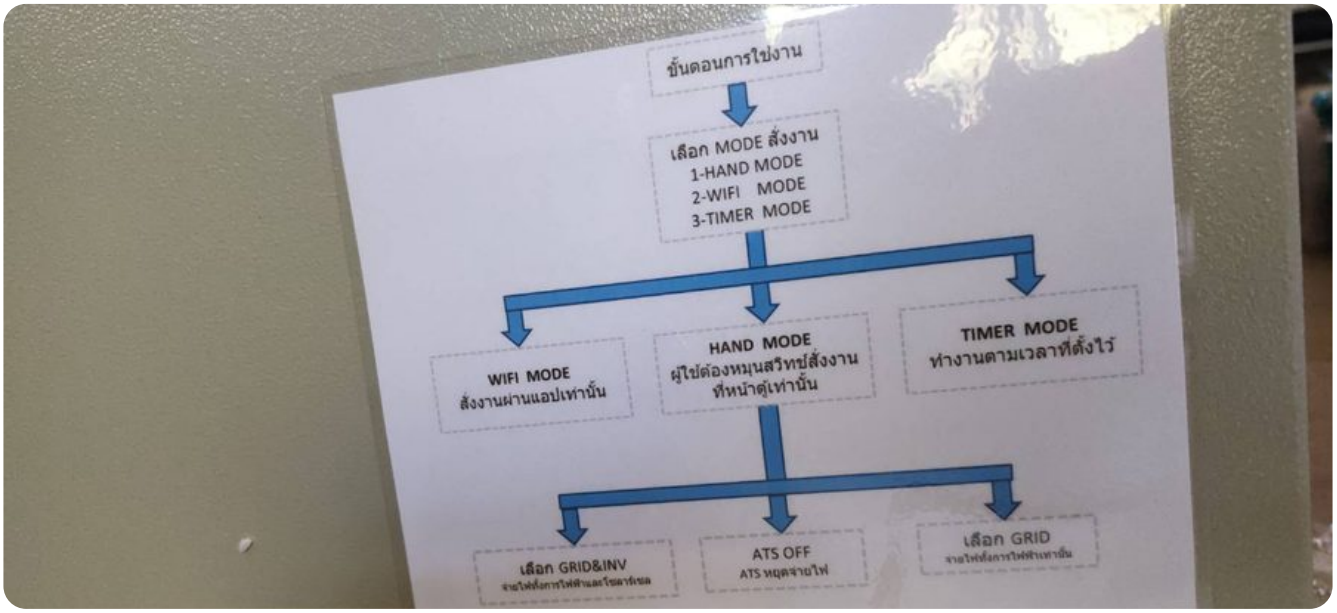

Operating instructions fixed inside the board door, in Thai

For prices and a design for your site, book a consultation at www.solaress.org or LINE: solaress1. All qualifications and certificates will be furnished upon request or upon completion of contract.