Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang, Chiang Rai 57100
Tel 063 151 6694 · 089 632 5829
www.solaress.org · www.โซลาร์เอสส์.com

SAMPLE QUOTATION · EV CHARGER 2ND CIRCUIT · OPTION COMPARISON

Option A vs Option B – EV charger 2nd circuit

PEA meter 30(100) A · 35 mm² from the meter to the pole box · CV-FR 2 × 16 mm² (≈45 m) in HDPE and IMC 1 in to the EV box · separate EV earth rod (TT) at the EV box · EV charger not included · Nov 2026

Option A

Breaker box at the pole + one 40 A EV breaker

Price on request
ask us for a quotation

1 · Site illustration

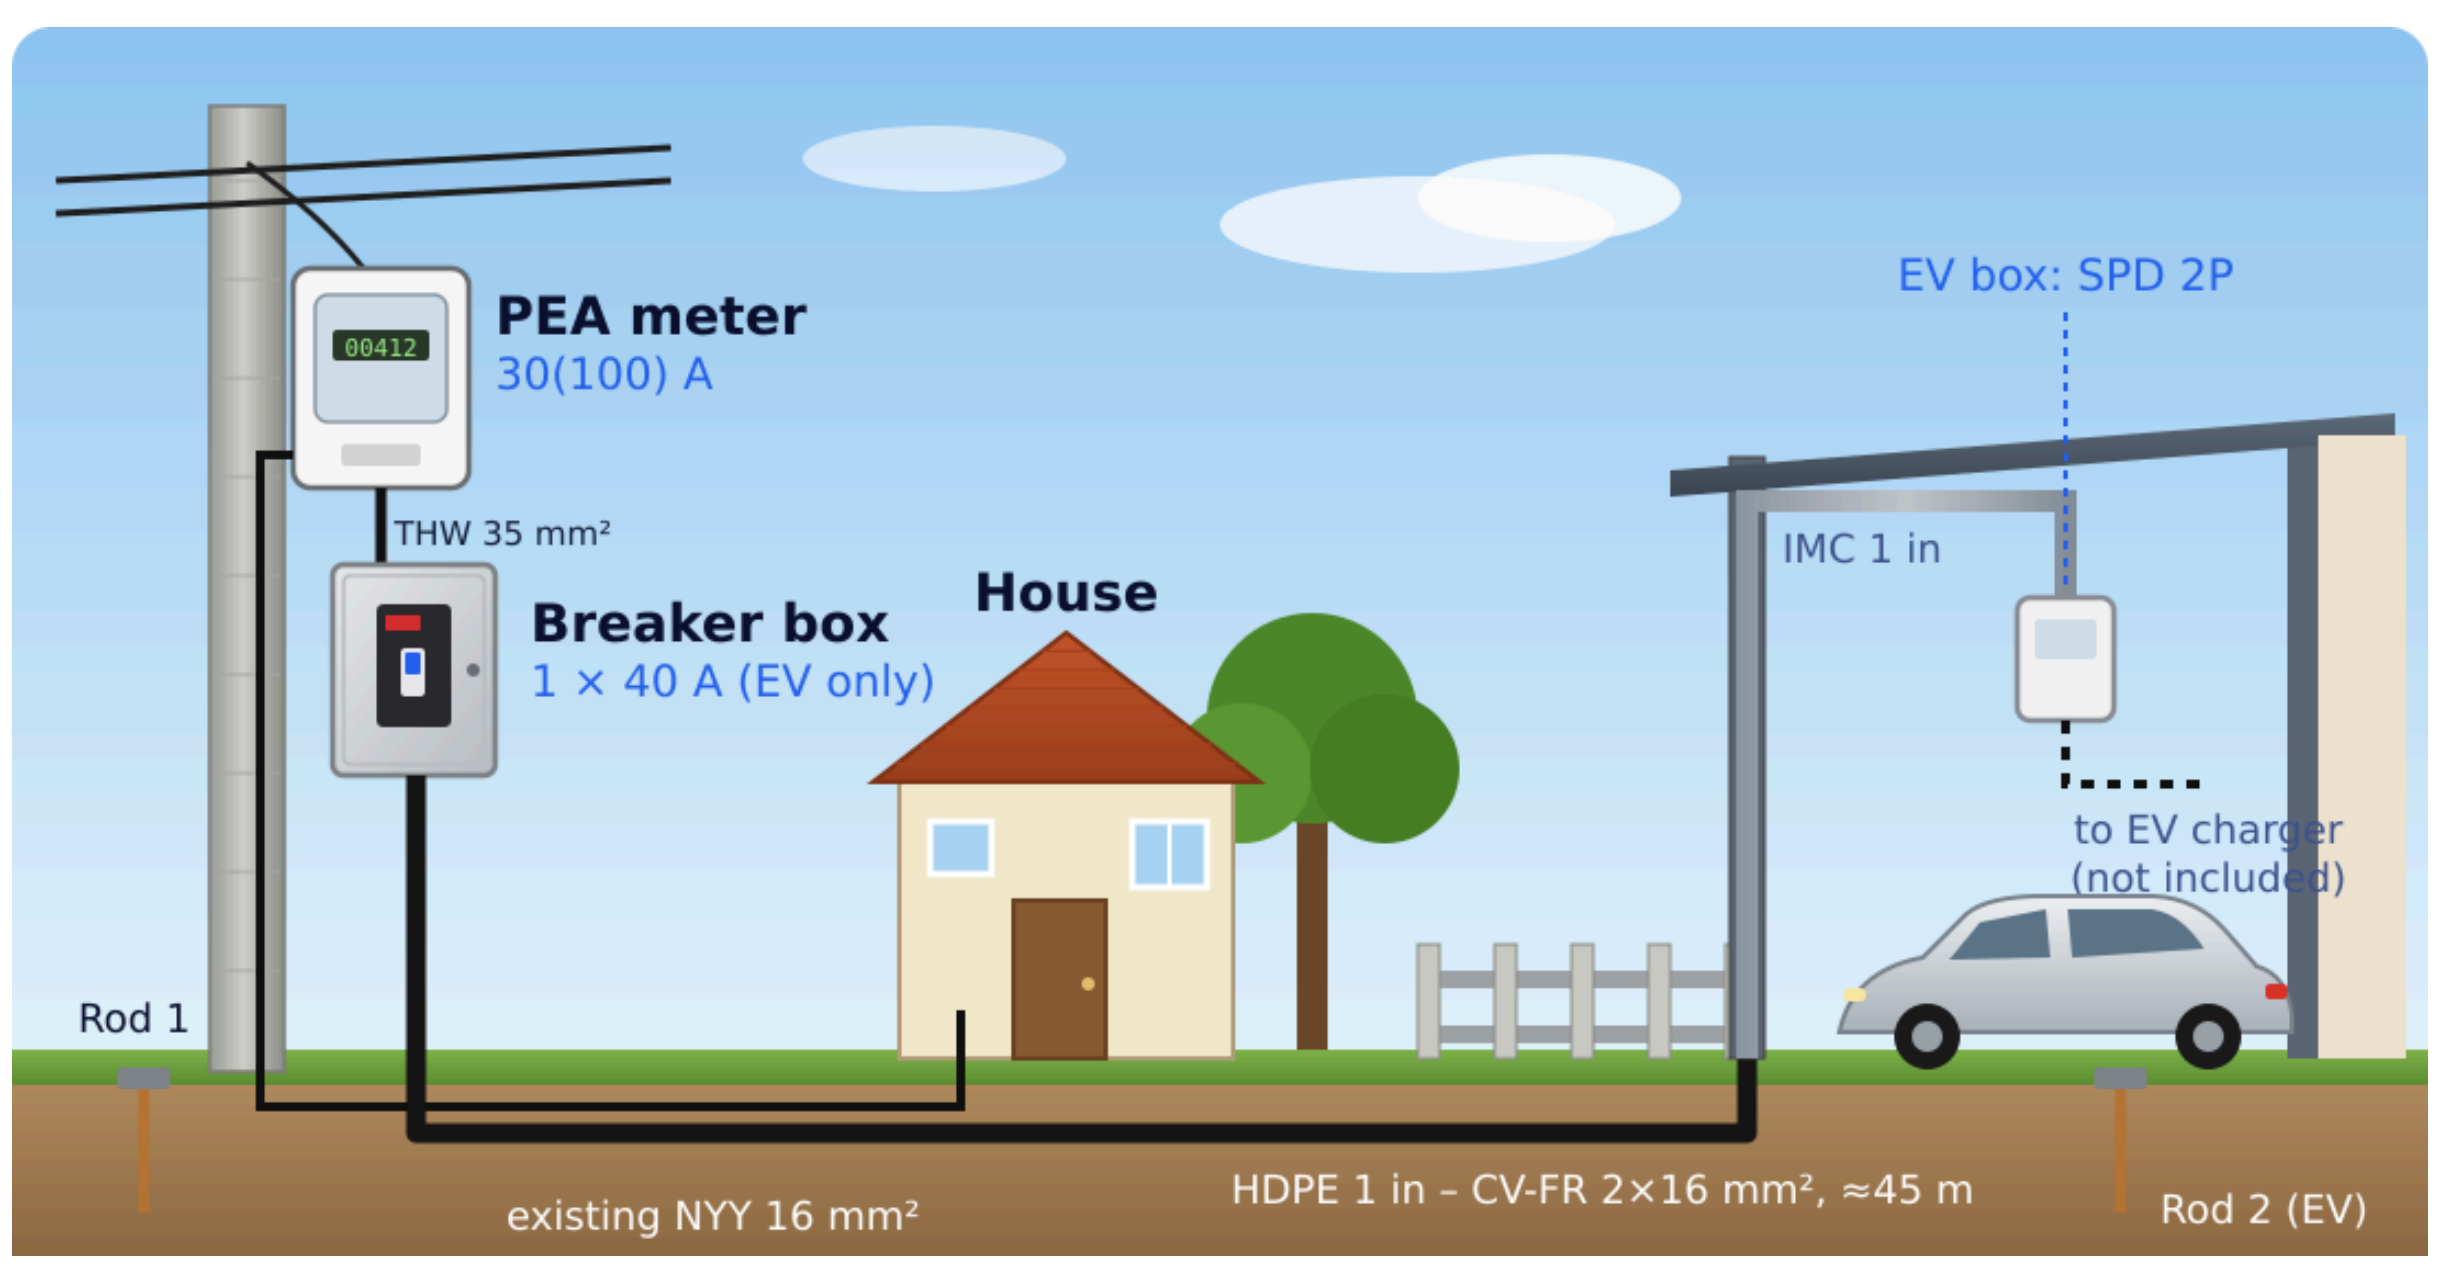

- Small KJL breaker box at the pole with **one CHINT 40 A 2P breaker** for the EV circuit only
- Fed by **THW 35 mm²** from the PEA meter; EV cable CV-FR 2 × 16 mm² protected from the pole
- EV box with SPD 2P at the charger location; EV earth rod 2 (TT)
- House stays on the meter as today – **no breaker at the pole for the house** and no surge protection for the house

2 · Single-line diagram

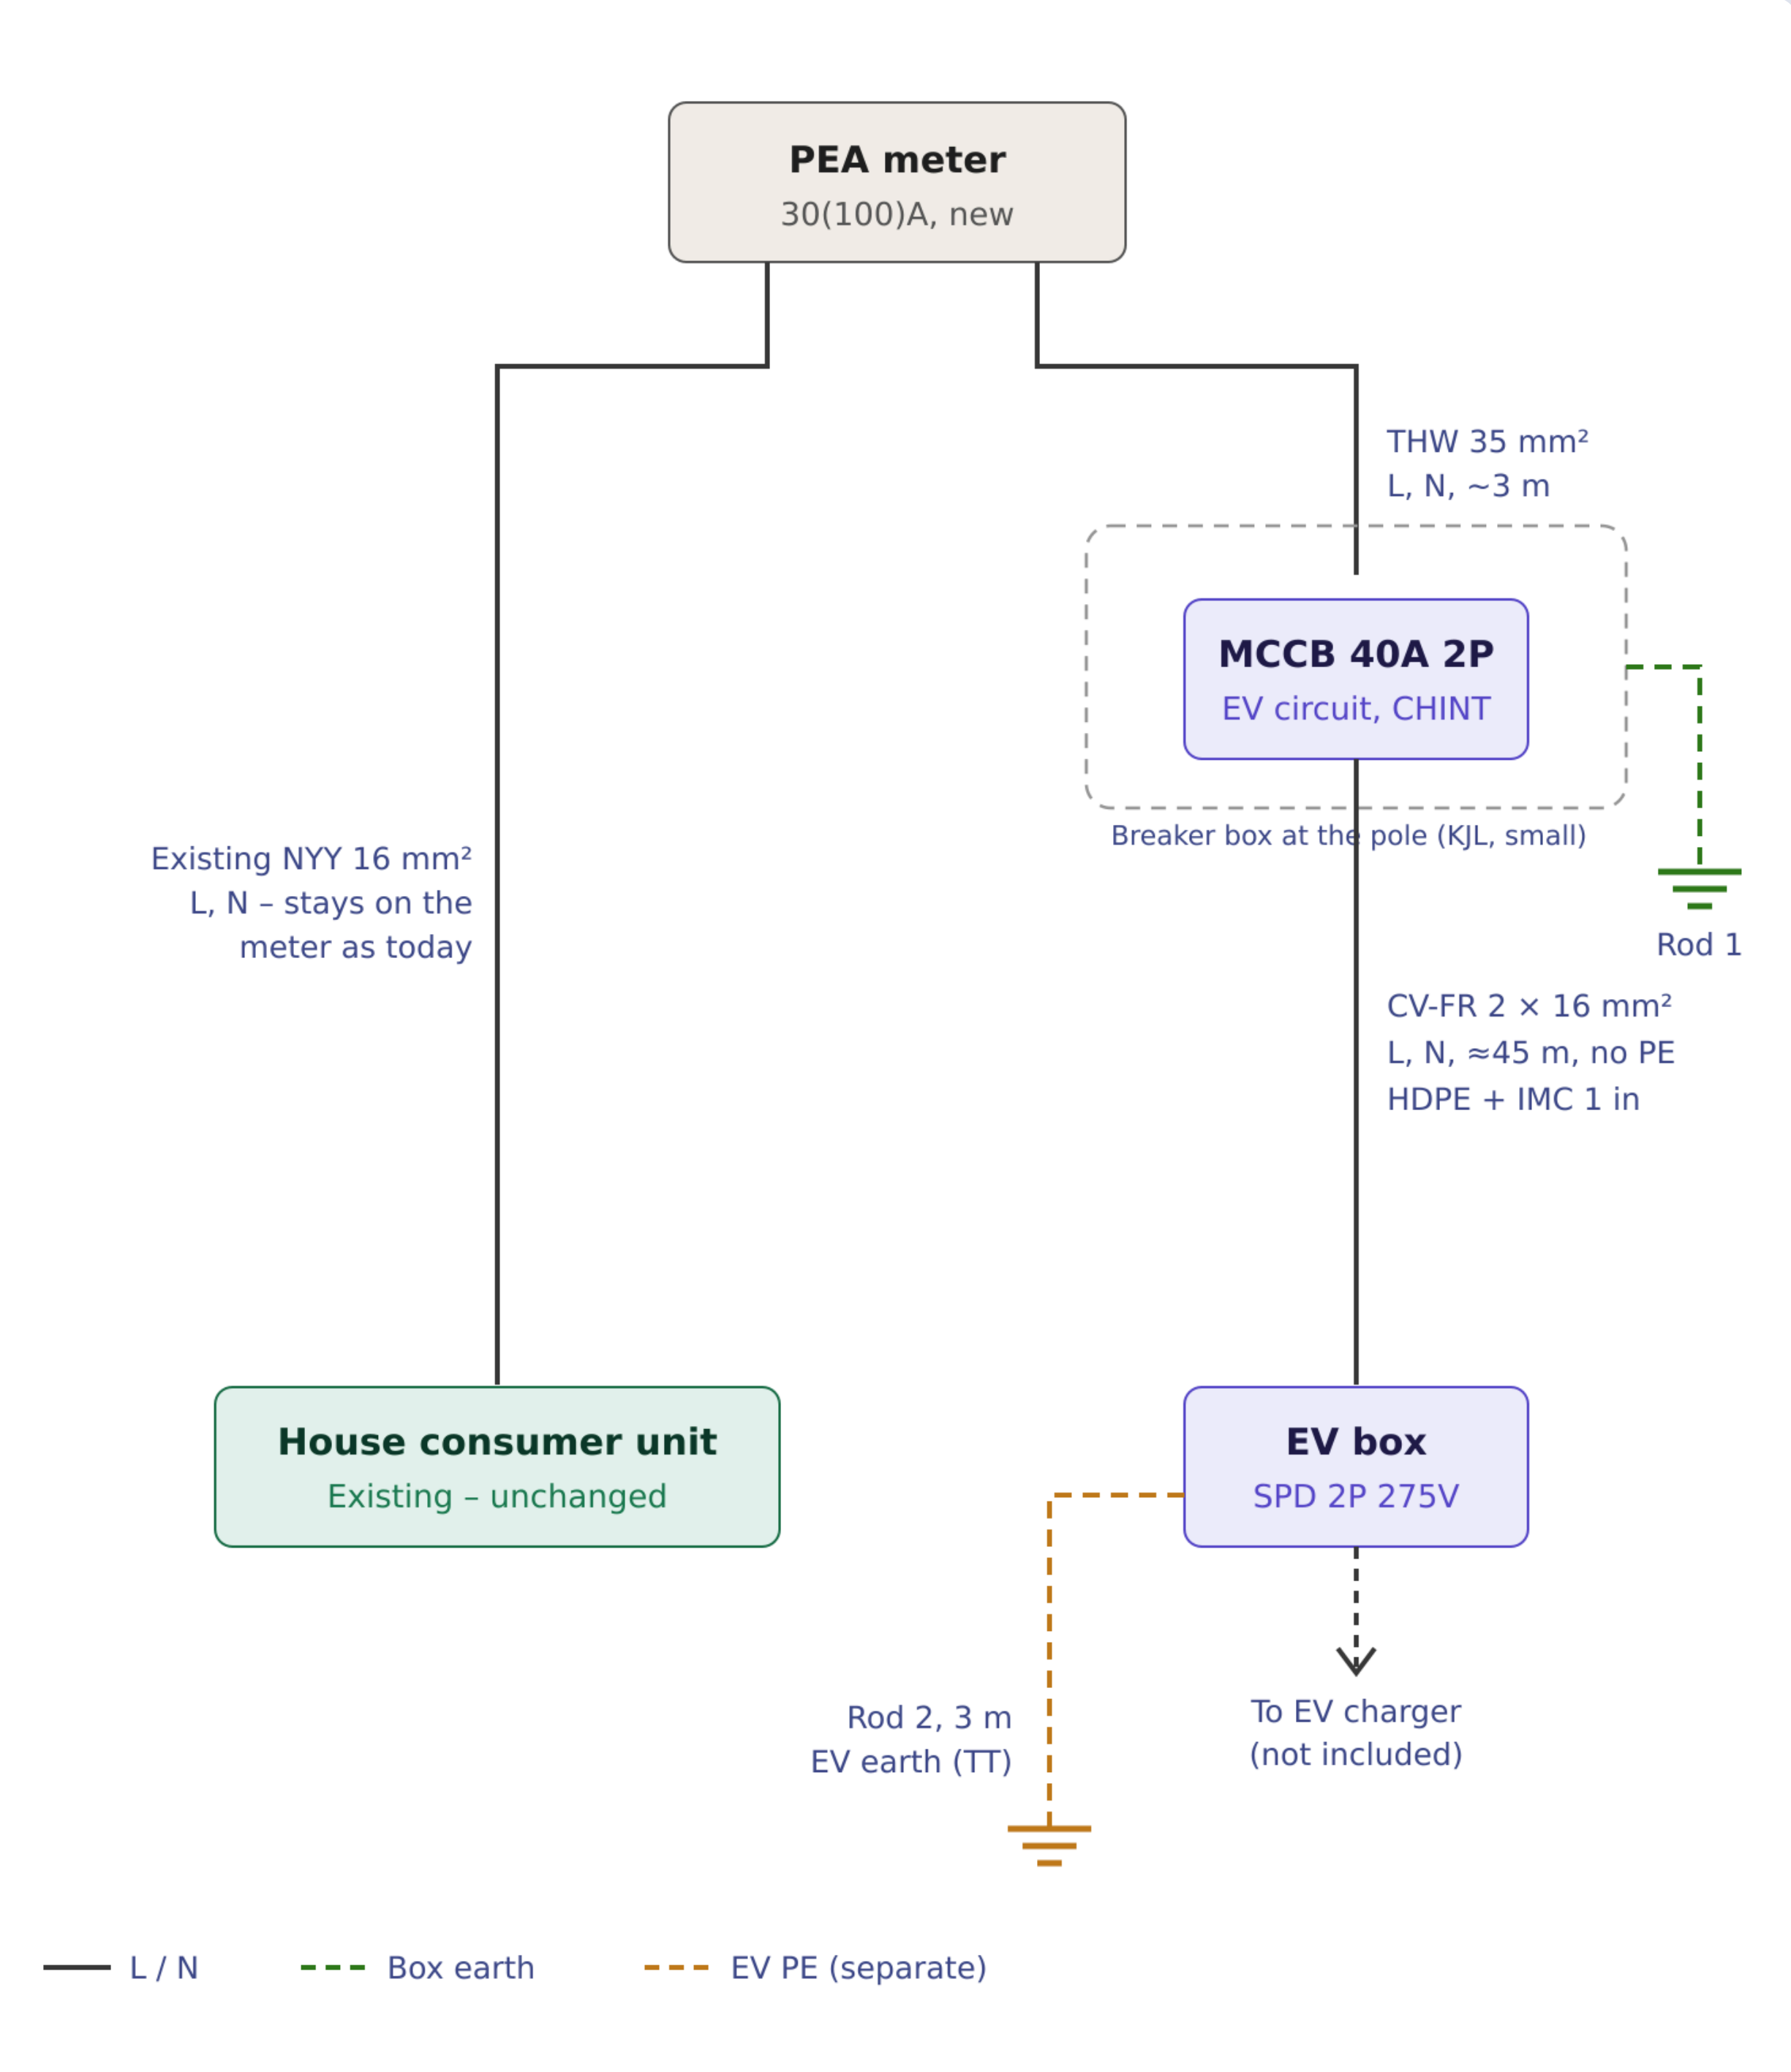

3 · Wiring – breaker box and EV box

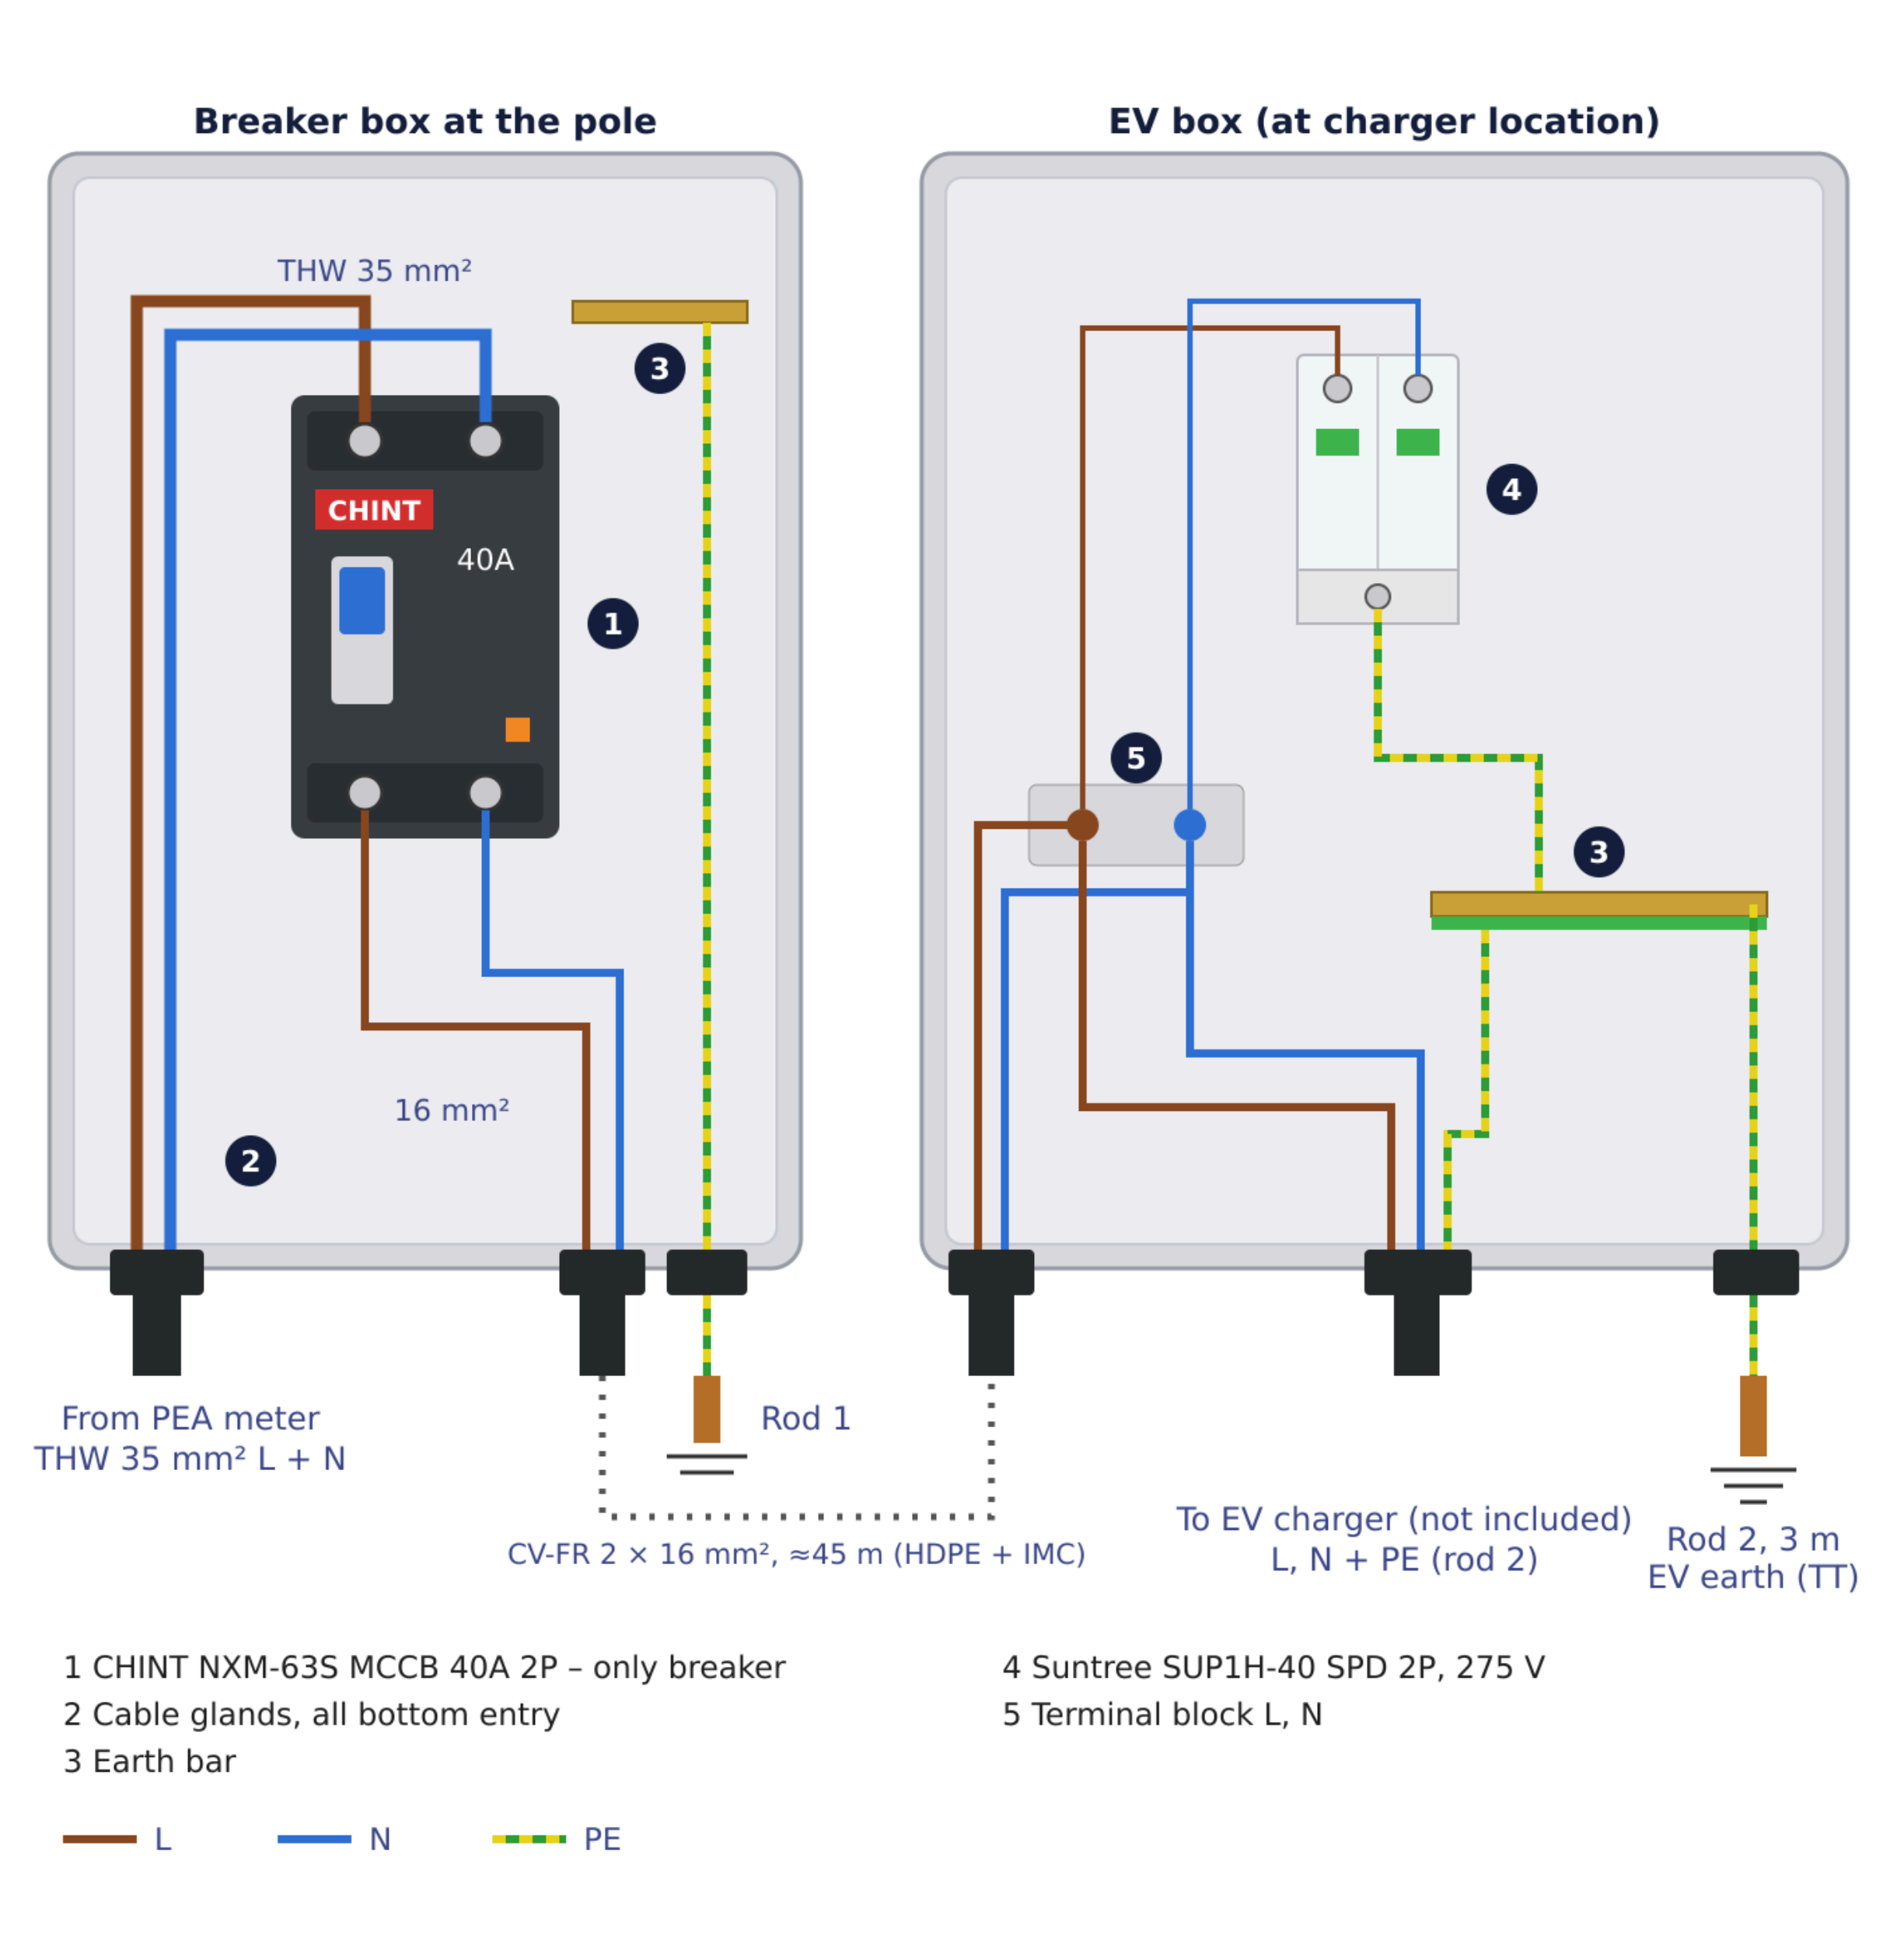
Breaker box at the pole
EV box (at charger location)
THW 35 mm²
CHINT
40A
16 mm²
1
2
3
4
5
From PEA meter
THW 35 mm² L + N
Rod 1
CV-FR 2 × 16 mm², ≈45 m (HDPE + IMC)
To EV charger (not included)
L, N + PE (rod 2)
Rod 2, 3 m
EV earth (TT)
1 CHINT NXM-63S MCCB 40A 2P – only breaker
2 Cable glands, all bottom entry
3 Earth bar
4 Suntree SUP1H-40 SPD 2P, 275 V
5 Terminal block L, N
L
N
PE

Option B ★ RECOMMENDED

With distribution box – KJL MCCB box at the pole

Price on request
ask us for a quotation

1 · Site illustration

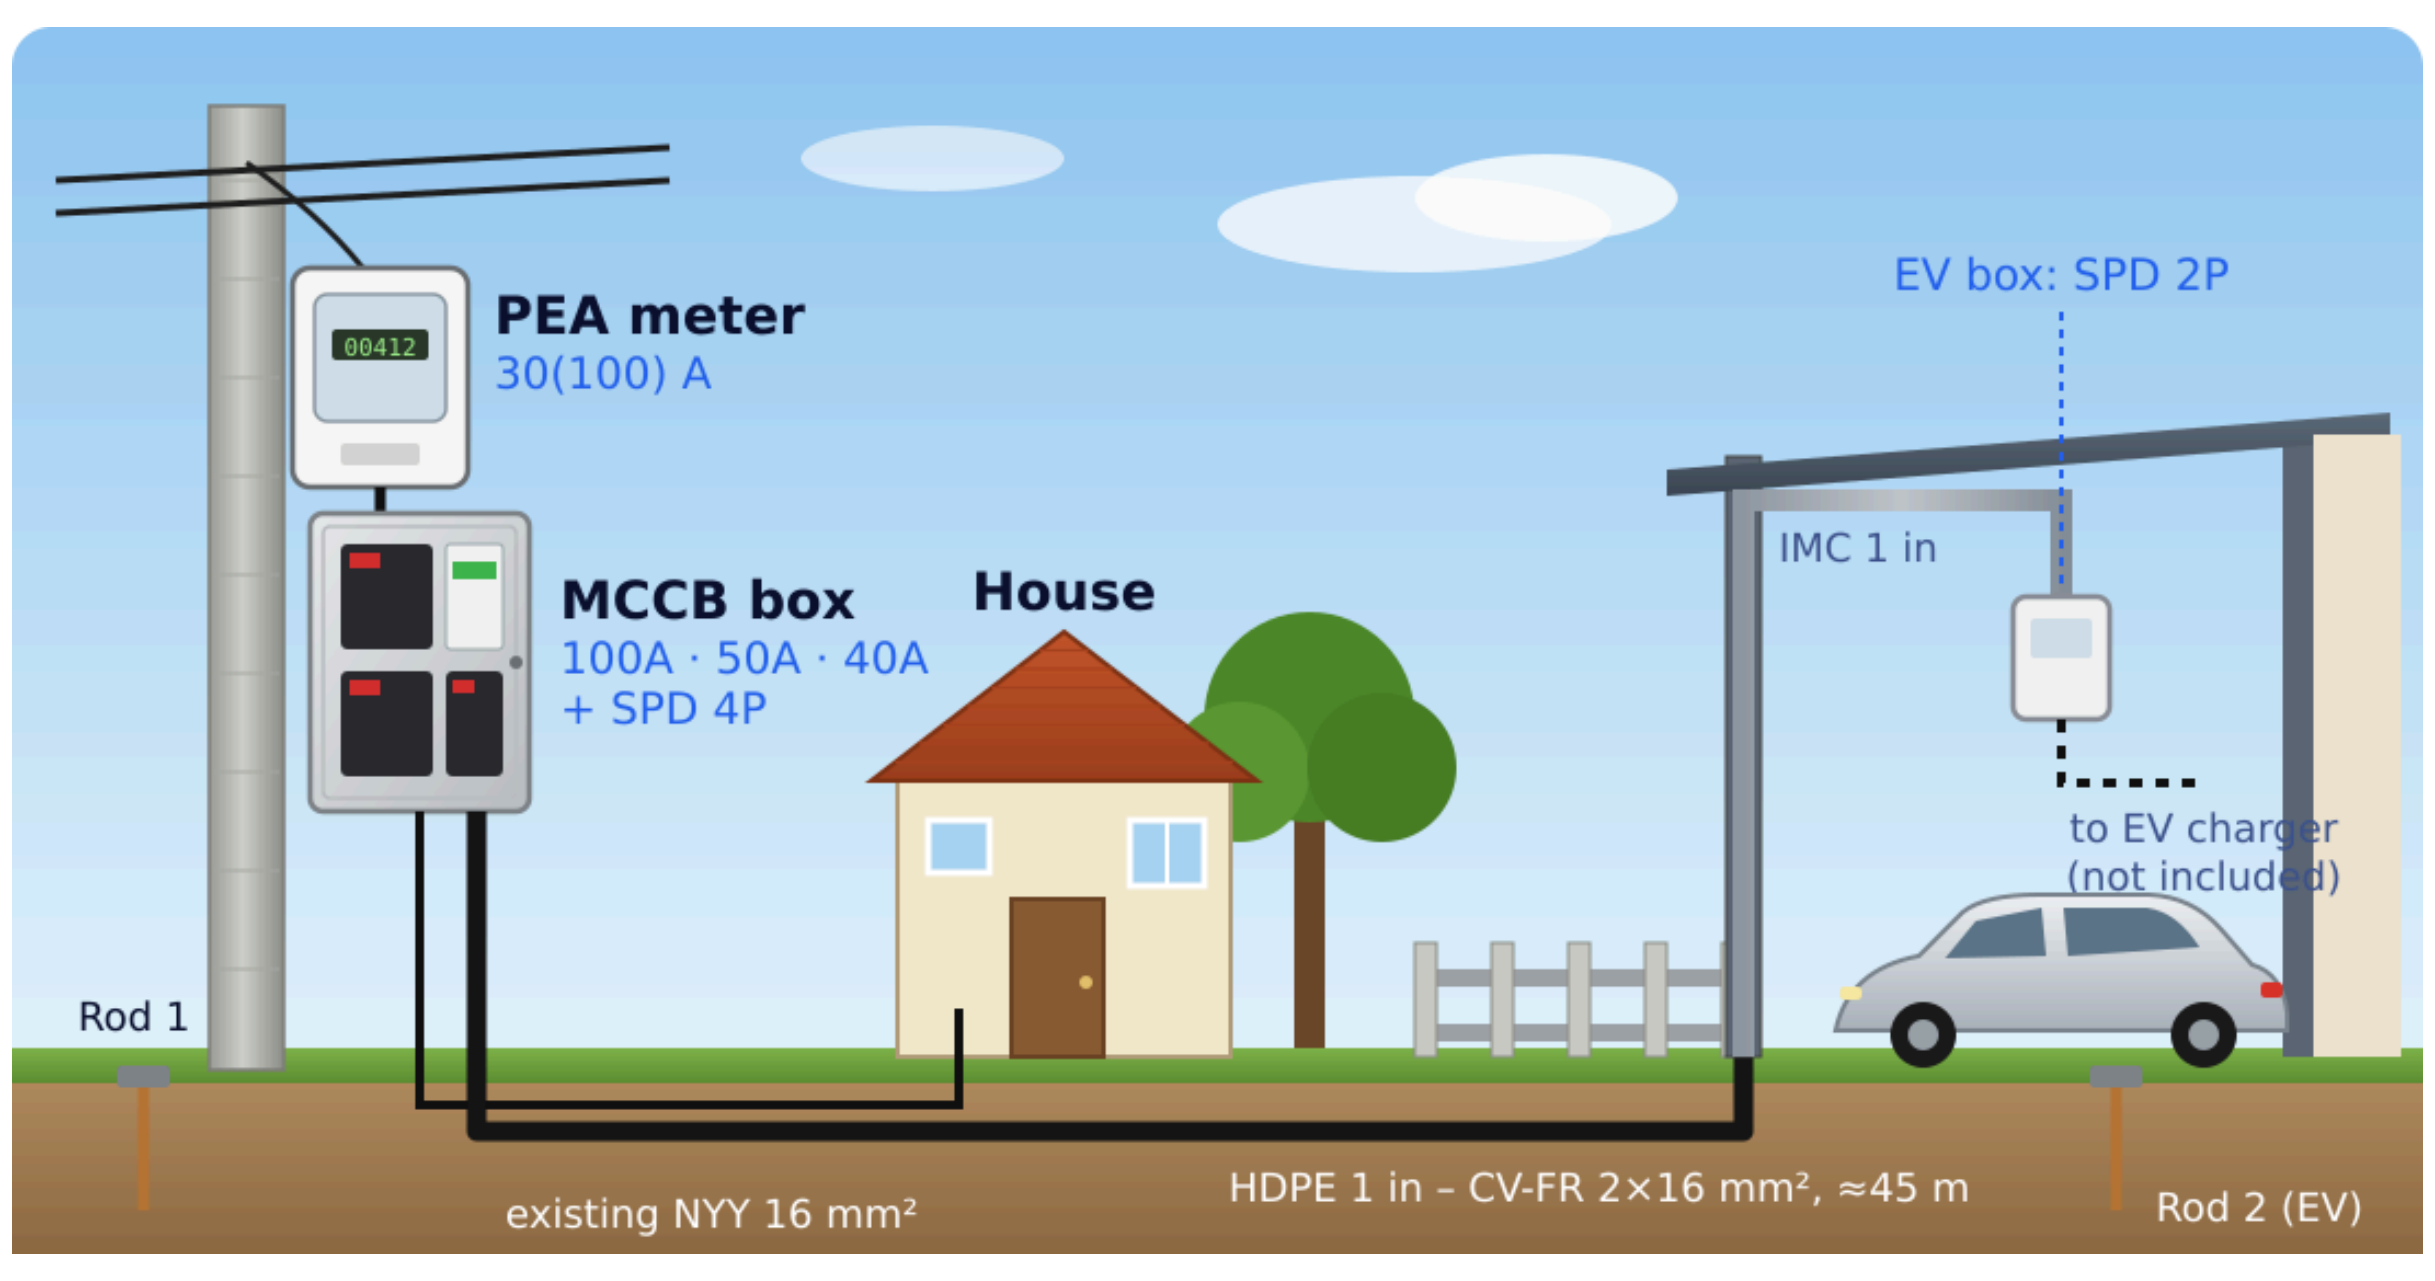

- KJL No. 3 box: CHINT **100 A 4P main**, **50 A house feeder**, **40 A EV breaker**
- Suntree **SPD 4P Type 2** for the whole house + SPD 2P in the EV box
- Earth bar with N–PE bond at the box (TN-C-S); RS485 link to the EV box
- **Whole EV cable and house feeder protected** from the pole

2 · Single-line diagram (based on design Rev17)

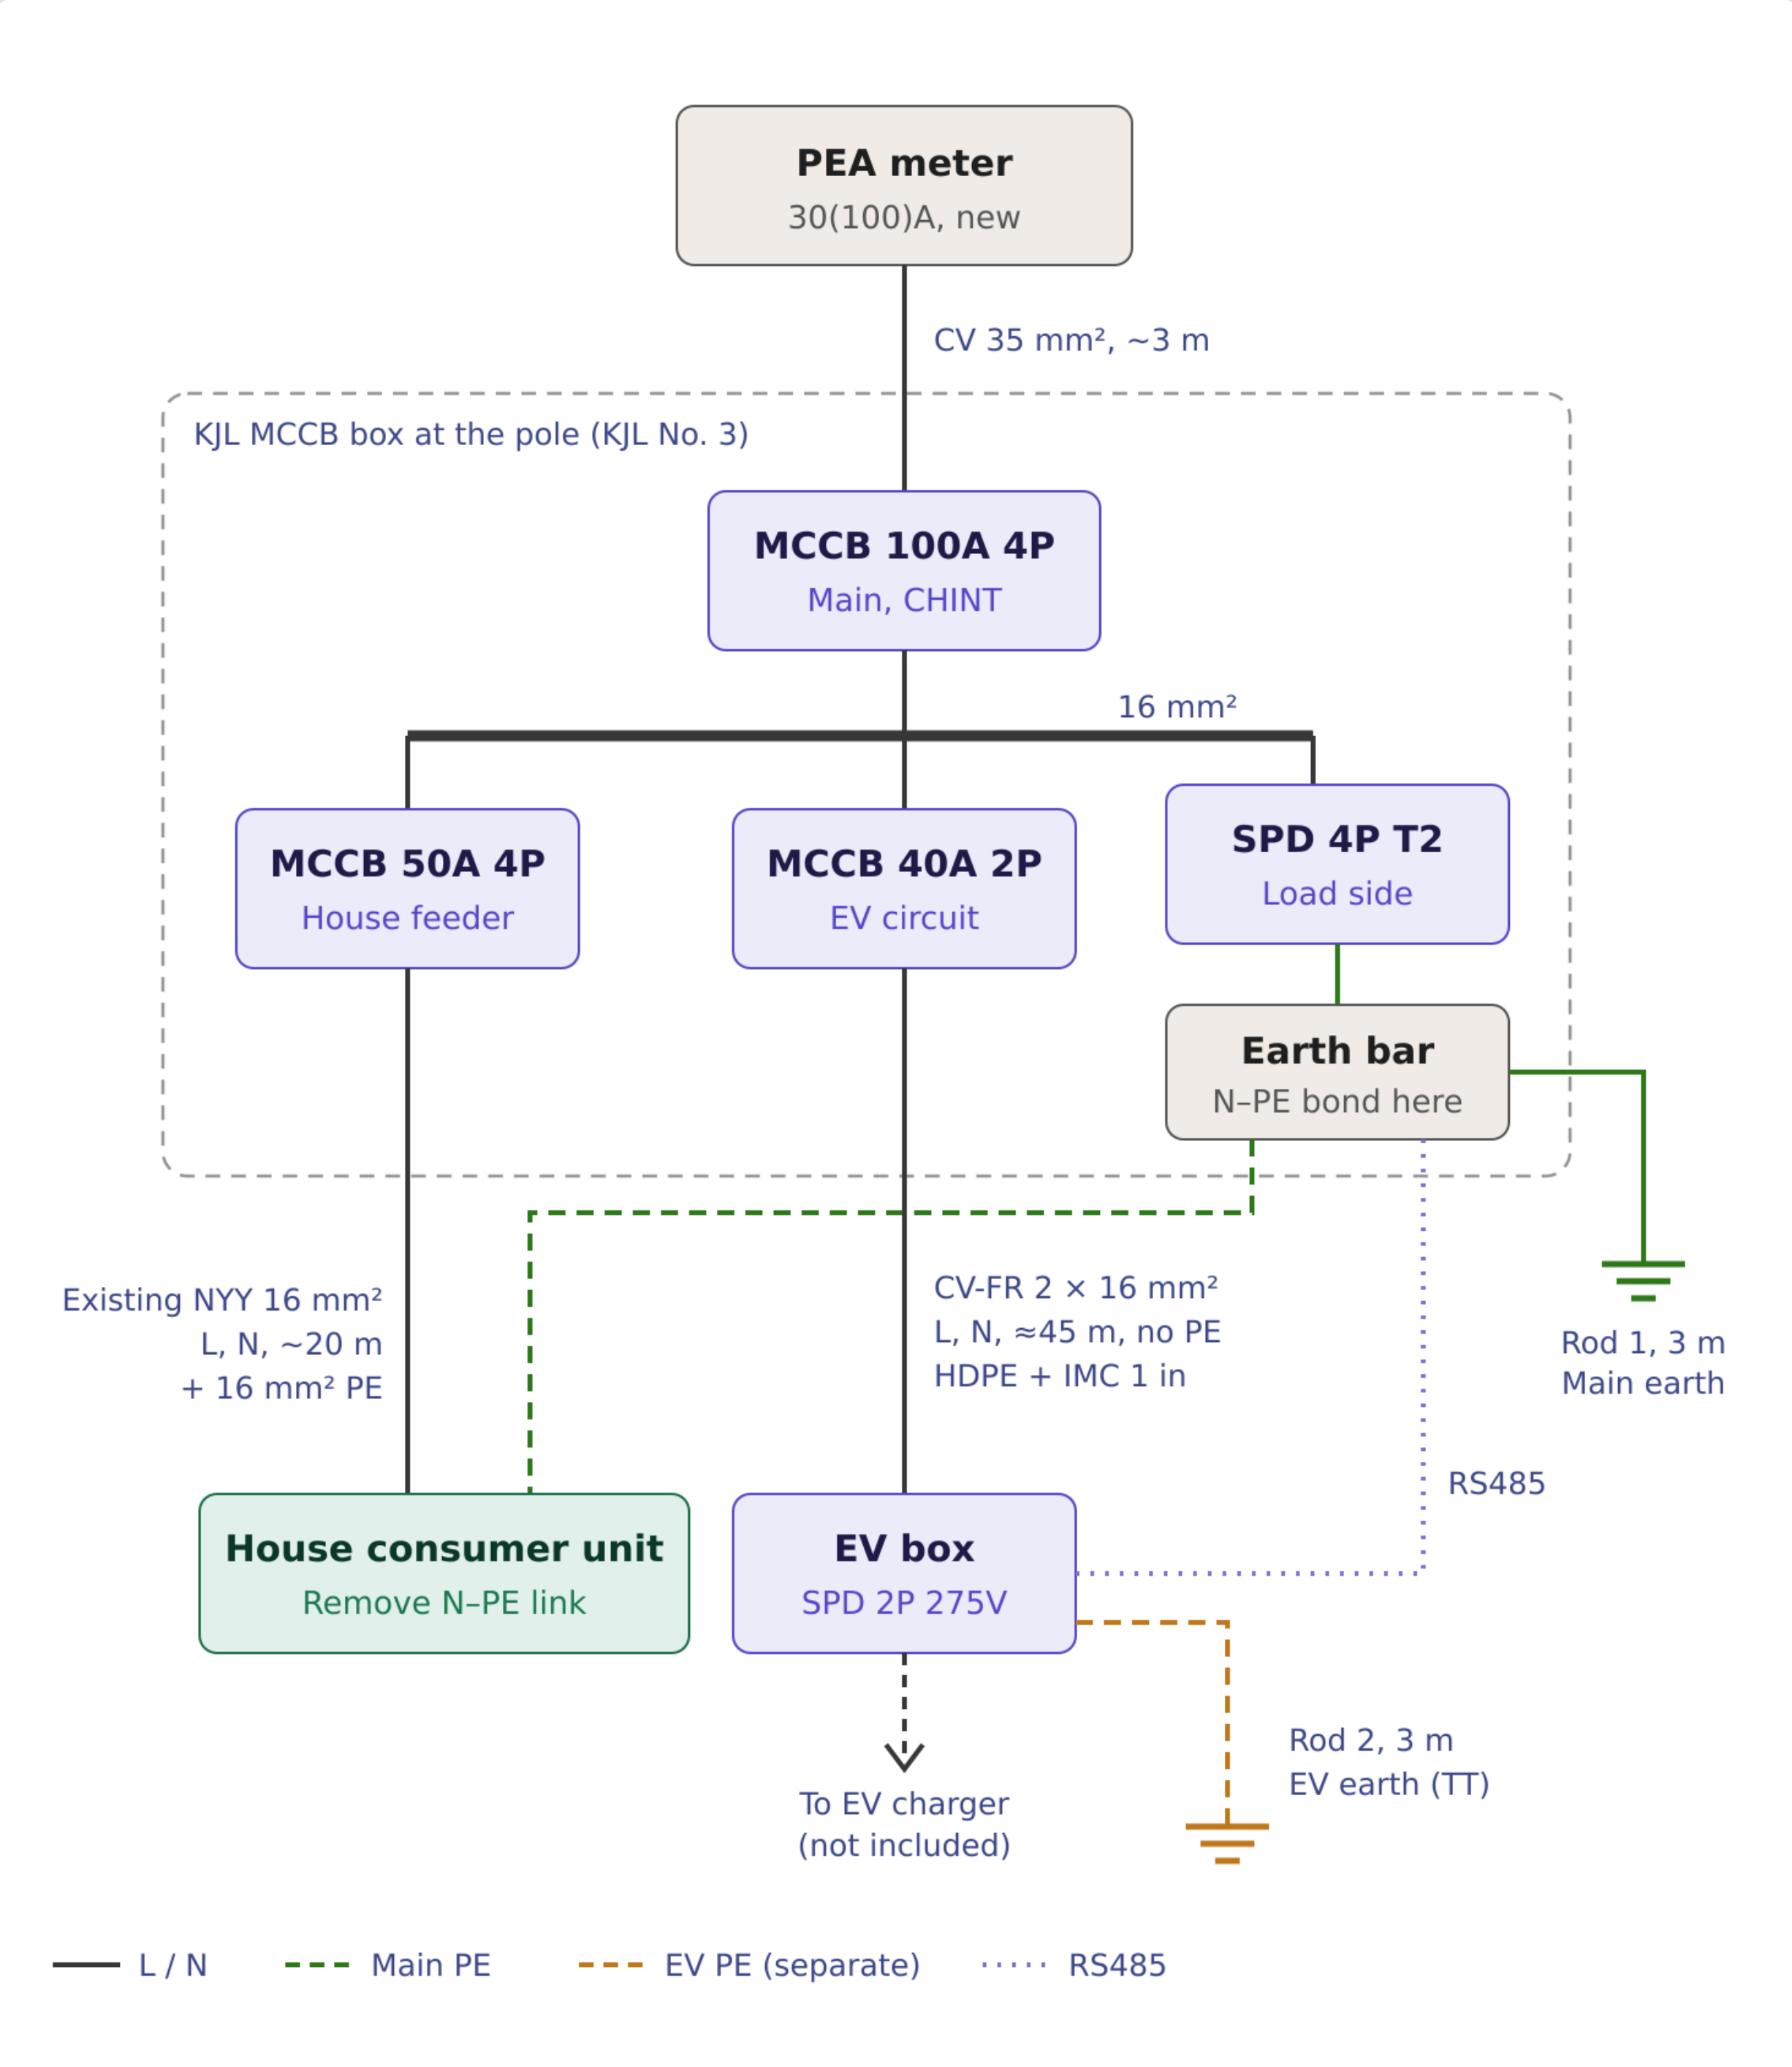

3 · Wiring – KJL MCCB distribution box (design Rev17)

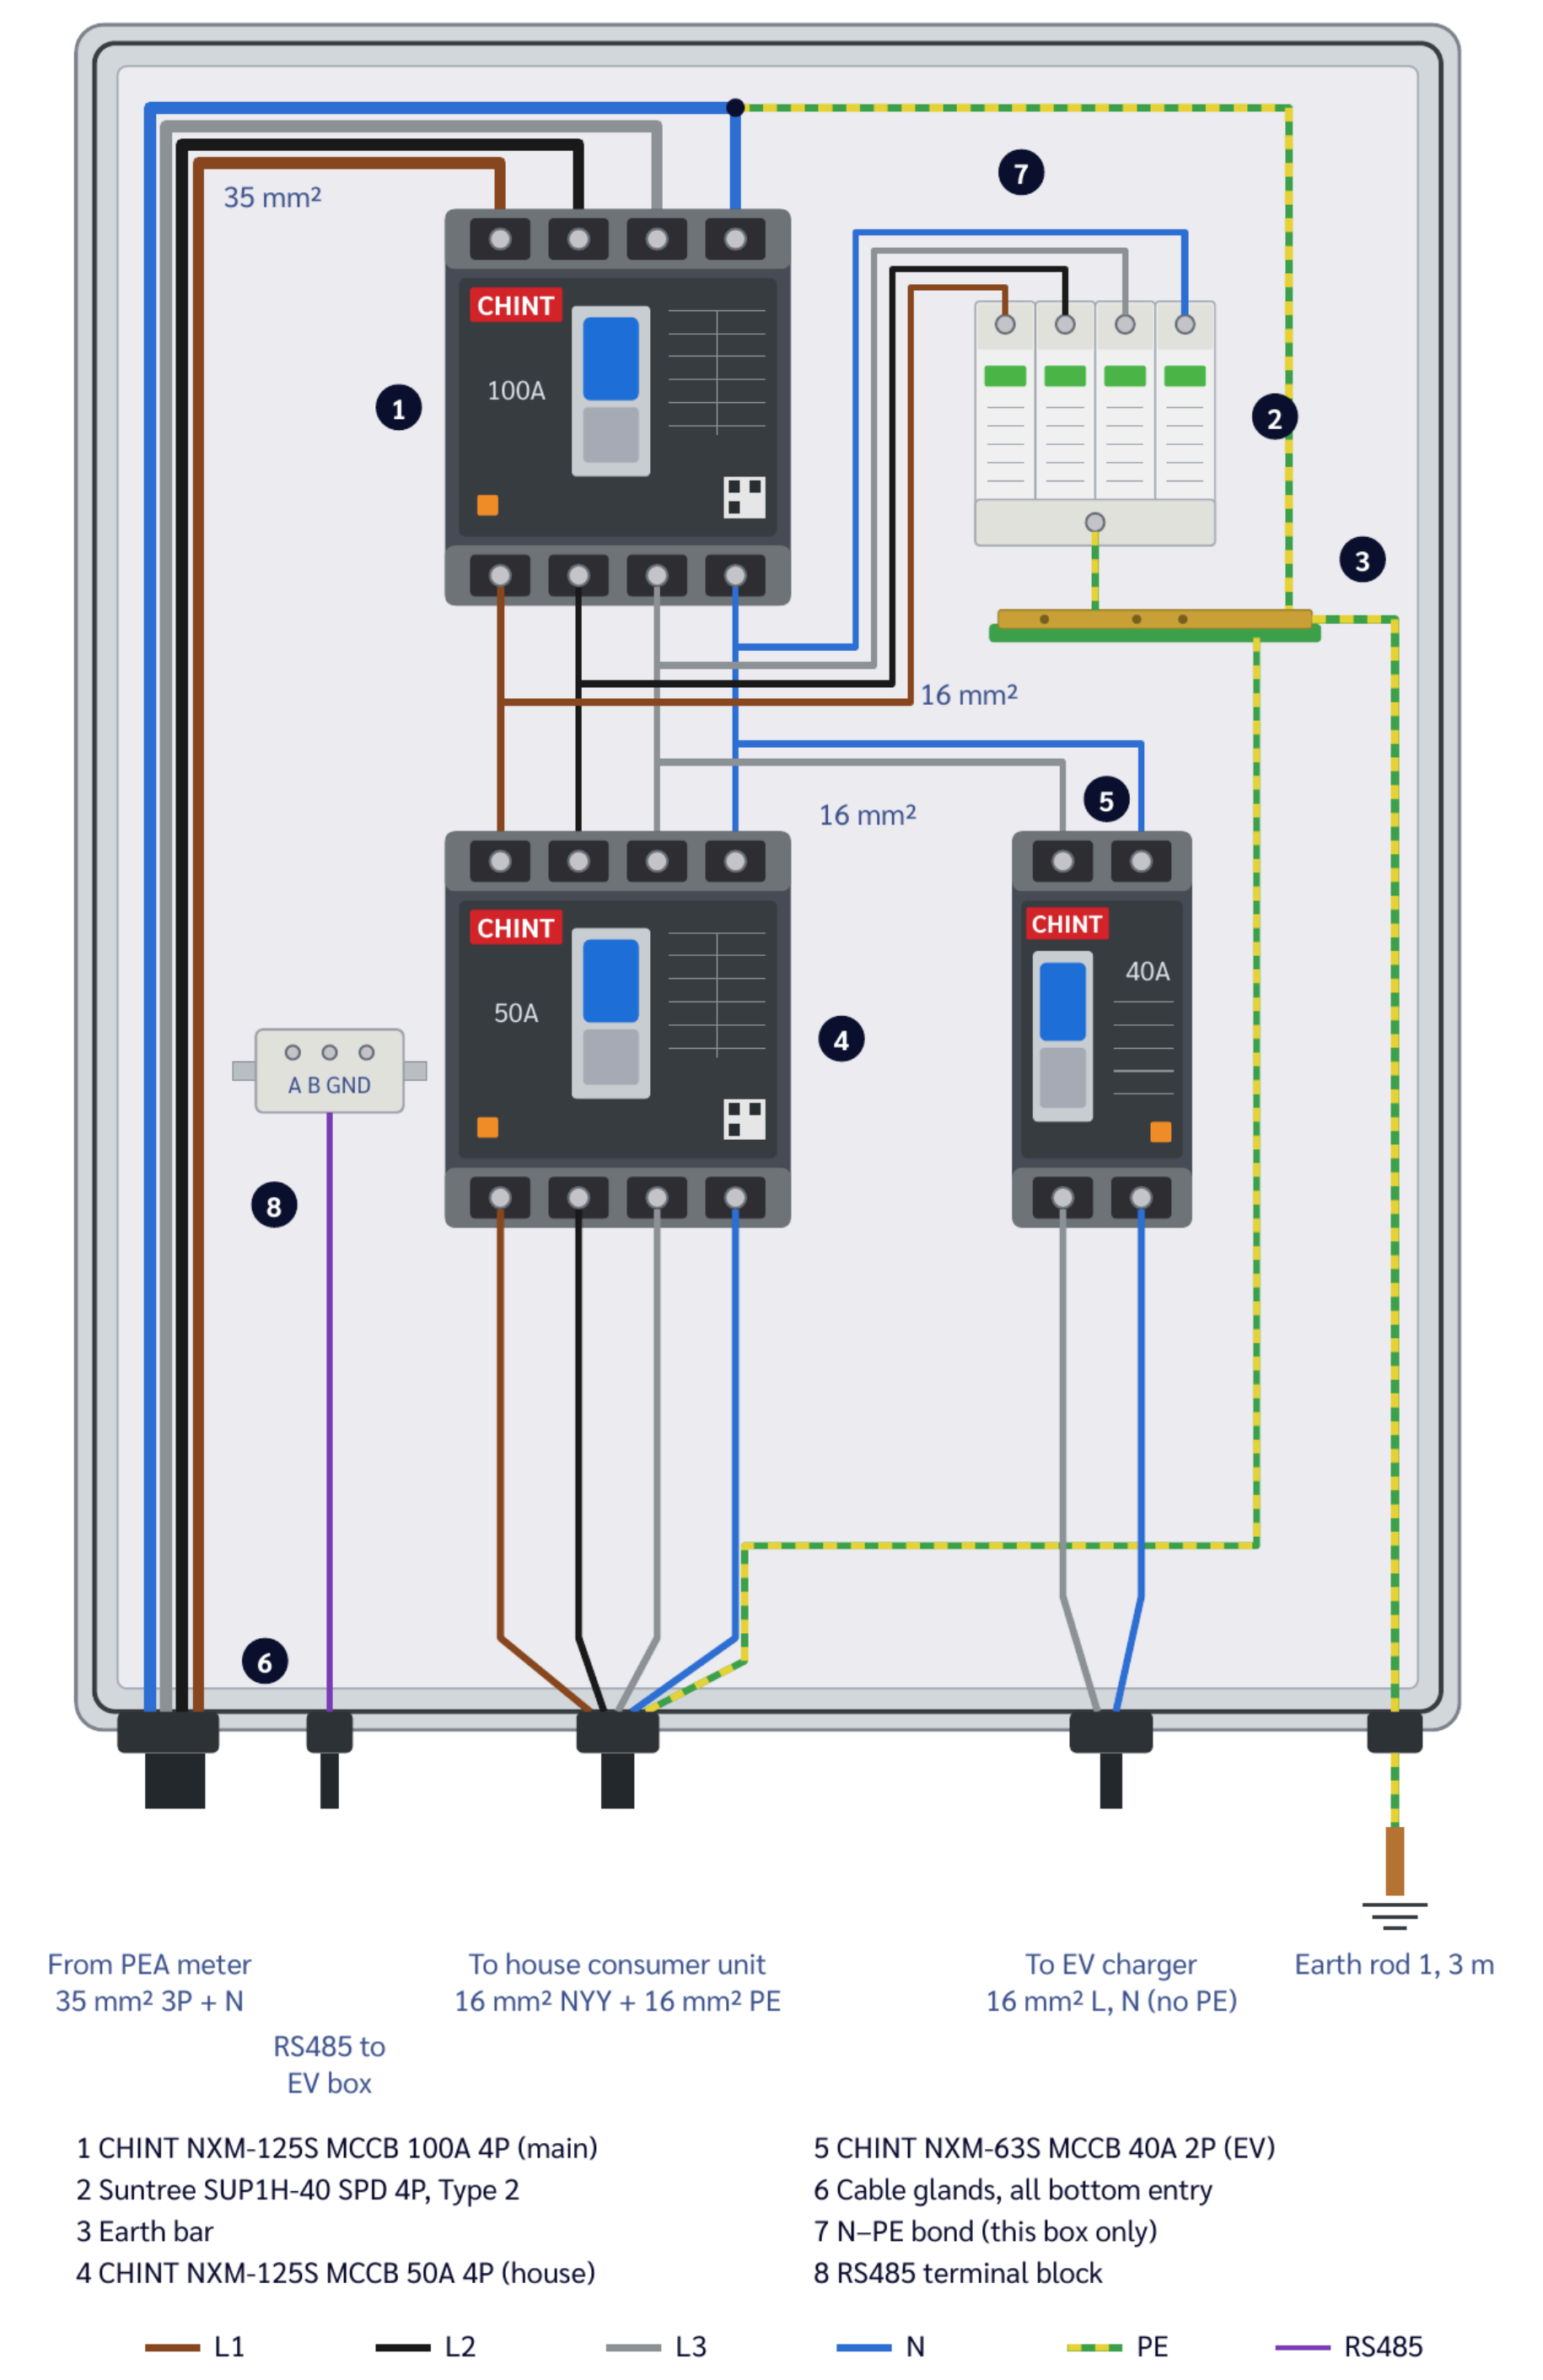

4 · What each option includes

Item	Option A – 40 A breaker box	Option B – MCCB box
EV package: CV-FR 15 m, HDPE, IMC 1 in, EV box + SPD 2P, 2 earth rods, lugs	✓	✓
PEA meter upgrade to 30(100) A + PEA application	✓	✓
35 mm² cable from the PEA meter to the pole box	THW, L + N	CV 4-core
EV cable CV-FR 2 × 16 mm², ≈45 m in HDPE + IMC	✓	✓
Box at the pole	Small KJL box	KJL No. 3 box
Main breaker MCCB 100 A 4P	–	✓
House feeder breaker MCCB 50 A 4P	–	✓
EV breaker MCCB 40 A 2P	✓	✓
Surge protection SPD 4P Type 2 (whole house)	–	✓
Earth bar with N–PE bond (TN-C-S), RS485 link	–	✓
Installation, testing and handover	✓	✓
EV charger	Not included	Not included

Option B adds
100 A main · 50 A house · SPD 4P
at the pole

Solar ESS recommends Option B.
The house feeder is also switched and protected at the pole, not only the EV circuit, and the whole house gets Type 2 surge protection. Ask us for a quotation for your own site.

The EV charger is not included in either option (owner to supply; it must have built-in RCD Type B, or Type A/F with 6 mA DC detection, as required by PEA/MEA MPESTD-001:2563). Customer details, location and prices have been removed from this sample.